







About Hexaboard Honeycomb

Our production is mainly HoneyComb Core and thermoplastic HoneyComb Sandwich panels. Our products with outstanding features such as lightness, high compressive strength and being eco-friendly, are used mainly in products such as van trailer, high-speed rail, aerospace, household goods, military, industrial, sports and leisure products. Due to it will make a very big and positive effect to our common living area, to increase the usage of this new composite material in our daily lives, has became our responsibility and duty.

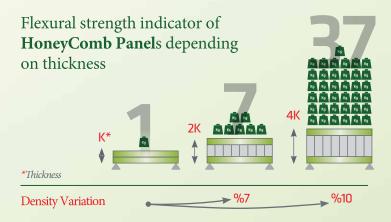

Hexaboard Specifications **PP HoneyComb** naming convention

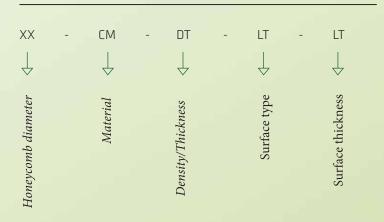

For example:

Type **9,6PP120/20WPC1,2**→ Honeycomb cell diameter : **9,6MM**

Material : PP

Density/Thickness : **120 kg/m3 - 20mm**Surface Type: **Wood plastic composite**

Surface Thickness: 1,2

Total Thickness: 20+(1,2x2)= 22,4 mm

Properties

Lightweight and robust High compressive strength

- High shear strength

Eco-friendly

Energy-saving
100% recycling
Does not contain volatile
organic compounds
Does not contain any harmful
odors or folmaldehit.

Resistance to Water and

Moisture

With their perfect water resistance, thermoplastic composites can be used in above-water structures

Resistance to corrosive liquids

High resistance against sea water and chemicals

Sound Insulation


Has the features of vibration reducing and sound absorbing

Energy absorber

The structure in the shape of customized honeycomb has the features of high level energy absorbing, high impact resistance and loadbearing.



Hexaboard Honey Comb Panel Type

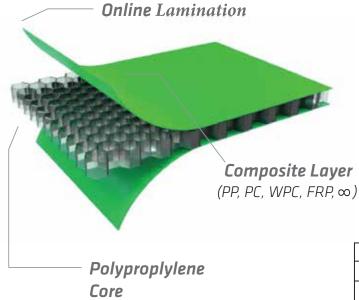


Hexaboard Honeycomb panel is a high techonolgy sandwich structure with a honeycomb structure inside, and high specific composite folios on both sides.

Due to its features such as lightness, high resistance and ecofriendly, made it the indispensable solutions of the main sectors such as Automotive, Construction, Furniture.

Thickness Details : 4 - 40 mm		
Core Type	: PP, PC Max.	
Width - Length	: 2,1 - 12 m	
Weight	: 1000 - 8000 gr/m²	
Surface Type	: PP, PC, WPC, FRP ∞	

Formable and Workable Panel Structure

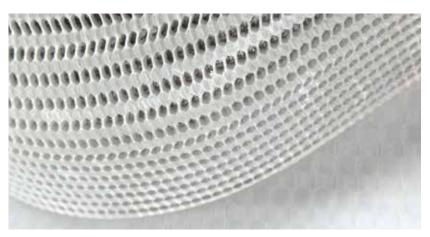







PENETRABLE





SCREWABLE

WORKABLE





PAINTABLE

STICKABLE





FORMABLE


CAN BE ADDED





CAN BE CUT



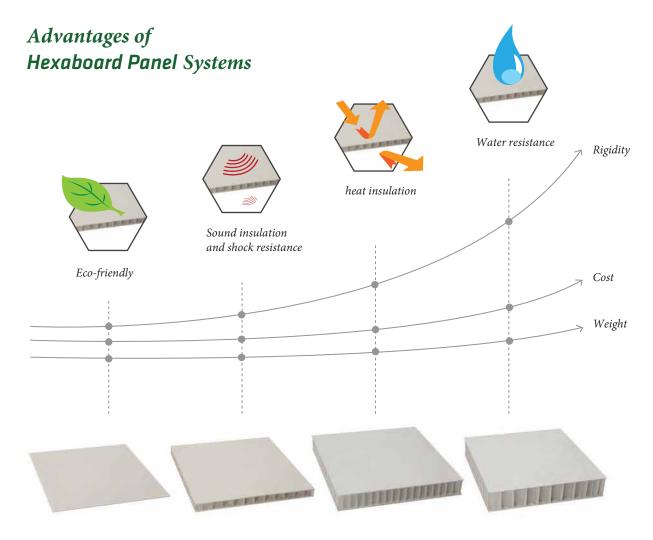

Cost effective solution suggestions are provided by ensuring optimization in production with Honeycomb core structure where all advantages are combined.

Thermal Insulation


Due to compressed air in the comb cells, thermal insulation performance of the Honeycombs is much higher, comparing to metals with hard polymer core, glass and sandwich panels. While thermal insulation coefficient of a typical PP comb structure Honeycomb was 0.07 WmK, thermal conductivity of panels with hard PP cores is approximately 0.02 WmK.


Product type	Aluminium and alloys	Glass	Classical Al composite panel with hard PP/PE core	PP Honeycomb composite panel
Thermal insulation performance	None or very weak	Weak	Good	Perfect



Comparison of Thermoplastic HoneyComb with other Panels

Hexaboard-Corrugated steel plate	Hexaboard-Plywood	Hexaboard-Fiber Reinforced Polymer
It is light, easy to install	It is light, easy to install	It is light, easy to install
High impact resistance	High impact resistance	High impact resistance
Resistant (with fiberglass)	Robust (with fiberglass)	Waterproof
Thermal insulation, waterproof	Waterproof, high heat resistance	High resistance to delamination
Foods can be carried	Foods can be carried	100% recyclable
Stainless, high corrosion resistance	Eco-friendly 100% recyclable	Easy to repair
Easy to repair	Increases resistance to oil and contamination	Long lifetime
Long lifetime	Easy to repair	
	Long lifetime	

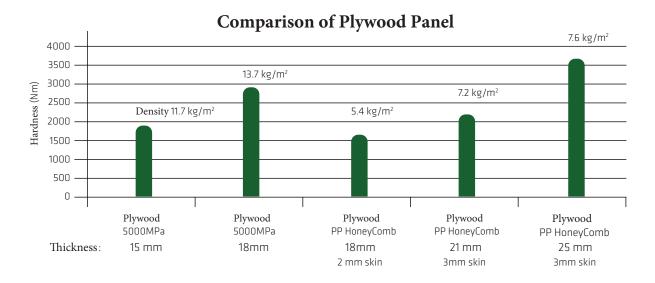

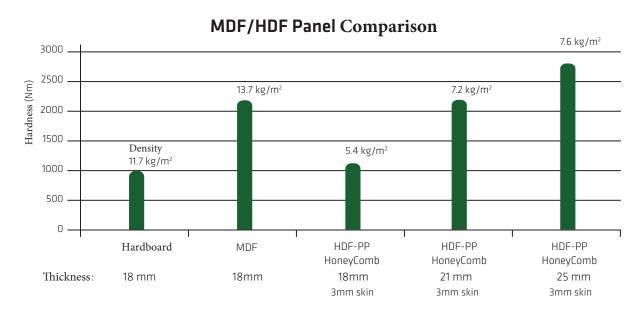

MDF board faced honeycomb tile is very effective in processing industry. When thickness of hardboard means at 18mm, 3mm HDF faced PP Honeycomb shows a bending lesser than half weight.



HoneyComb Panel Features

Lightness

 Honeycomb plates consist of two surface plates and a honeycomb shaped core structure.

With low density property of the thermoplastic structure, superiority is provided compared to materials such as metal and ceramic and others

Recycling

Panels are 100%
 recyclable. Our product
 which is free from
 additives such as adhesive
 film, consists of PP and
 composite folios.



Impact Resistance

- In room conditions, when 20mm diameter of load is applied, impact resistance is over > 80J and at -20 °C up to 35 J.



Chemical Resistance

PP comb structure and composite folio provide superior resistance against chemicals.



Compressive Strength

On the short term loadings, it is determined that it has resistance up to 1.6 Mpa of pressure, on 75x75mm area.



Procedures

 Panels can be formed with chip removal and thermoforming methods.
 It is suitable especially for riveting, welding and bonding



Environmental Resistance Factor

It is proven with tests that surface plates have perfect UV resistance and also show high resistance against chemical, petrol and oil derivatives.

Water absorption of the panel is below 1.4%.



Thermal Insulation

Our panels whose thermal conductivity in room conditions is less than 0.12 W/mK, also can be used for heat insulation purposes.



Bending Feature

There is no torsion observed on 8 kg of load which is put along the 600 mm of the bearing support distance of the standard plate in 30mm thickness and 100mm width.





Application Areas

Advertising Materials

01

Usage Area

Displays, Exhibition Displays, Indoor and Outdoor Signage and Branding, Architecture and Decoration

Advantages

- Lightness Direct Flat Printing
- Recycling Feature
- UV resistance
- Moisture resistance
- High resistance Easy to install and process Reusability







Pallets and Plastic Container

Usage Area

In packaging of all kinds of industrial products

- Advantages

- Lightness
- High resistance
- Recycling feature
- Resistance against moisture and chemicals





Automotive

03.

Usage Area

Load-bearing floors, side panels, baggage pool, the internal components

Advantages

- Lightness
- High Resistance
- Moisture resistance
- Easy to form





Usage Area

Commercial vehicle trailer

Advantages

- Lightness
- Compressive strength to the load
- Energy absorption
- Easy to install and use
- Recycling feature



Yachting

05

Usage Area

Body, division, deck, basic construction, interior design

Advantages

- Lightness
- Energy-saving
- Shock absorption
- Corrosion resistance
- Sound insulation



High-Speed Train

06

Usage Area

Floor, side and roof coverings

- Advantages

- High Strength Excellent Sound Resistance
- Shock resistance
- Moisture resistance





07

∠ Usage Area

Each surface of the tank, the outer composite structure, the top, base and side portions

Advantages

- Sound insulation
- Shock resistance
- Water resistance, humidity resistance Long-lasting
- UV-resistant.



Solar Panels

08

Usage Areas

Supporting division of solar panels

Advantages

- UV resistance,
- Lightness
- Moisture resistance
- High strength



Household Appliances

09

Usage Area

Upper and divisive trays

- Advantages

- High strength
- Moisture resistance
- Lightness
- With other mounting components ultrasonic welding possibility





Prefabricated House

Usage Area

10

Wall panels, floor panels, kitchen, partitions

Advantages

- Easy installation and removal
- Reusability
- Water and moisture resistance
- Excellent sound resistance
- Excellent dimensional stability
- Strong shock resistance
- Thermal insulation



Construction

- Usage Area

Formwork and support parts

Advantages

- Lightness
- Moisture resistance
- High strength
- Recycling capability
- Reusability



Granite and Natural Stone Support Panels

- Usage Area
In all kinds of natural stone applications

Advantages

- Lightness
- High strength
- High shock resistance



Carrying Chests

∠ Usage Area

In all kinds of carrying chests, travel bags and lugagges

- Advantages

- Lightness
- Moisture resistance
- High Strength
- Recycling Feature







Hexaboard Kompozit Pazarlama Ve Ticaret Limited Şirketi

Barbaros Mah Al Zambak Sokak Varyap Meridian A Blok No:2 Kat 5 D:65

Ataşehir / İstanbul/ TURKEY

Tel: +90(216) 504 77 32 Fax: +90(216) 504 77 31 info@hexaboard.com.tr